



NEW


PRODUCT FEATURES

- **IGBT**
Full Digital IGBT Inverter Control technology, gives best welding current waveform control of CO₂/MAG arc phenomenon, results low spatter welding.
- **EASY OPERATION**
Less Buttons, Easy to Operate.
- **DIGITAL PARAMETER SETTING**
All parameter settings by digital operation
- **WELDING CONDITION STORAGE FUNCTION**
Up to 30 welding conditions can be stored, 10 regular used conditions can be read and operate from remote control box.
- **HIGH POWER FACTOR**
 Due to High power factor, low input current is required; Therefore reduce cost due to less electricity consumption.
(CPVE-400: 0.95; CPVE-500: 0.96)
- **SAVING ENERGY**
 After stop welding a certain period of time, fan and flow-meter heater will automatically stop for saving energy.
- **NUMEROUS INTERNAL FUNCTION**
Initial condition / Penetration control / Anti stick time and voltage adjustment / Pre-flow and Post-flow time adjustment / Up slope and Down slope time adjustment.
- **CONNECT TO AUTOMATIC MACHINE**
Optional terminal for automatic machine available.
- **OPERATION LOCK FUNCTION**
With key lock function, prevent unintentional operation that may change preset welding conditions.
- **PASSWORD LOCK FUNCTION**
With password function to lock welding conditions.



Connection Diagram

Warning This color reflects standard composition.

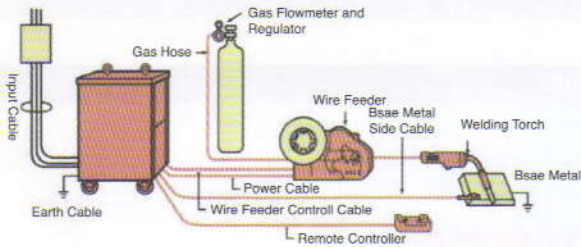

Input Power Capacity and Cable Specifications

ITEM	CPVE-400	CPVE-500
Power Source Voltage	380V or 415V ±10%	380V or 415V ±10%
Phase	3 Ph	3 Ph
Frequency	50/60Hz	50/60Hz
Input Power Capacity	18.9 KVA / 15.5 KW	26.1 KVA / 21.9 KW
Fuse / Breaker Capacity	40A	50A
Input Side Cable	More than 6 mm ²	More than 10 mm ²
Wire Feeder Side Power Cable	More than 50 mm ²	More than 70 mm ²
Base Metal Side Power Cable	More than 50 mm ²	More than 70 mm ²
Earth Cable	More than 6 mm ²	More than 10 mm ²

Standard Composition and Specifications

Welding Power Source	CPVE-400	CPVE-500
Rated Input Voltage	380V or 415V ±10%	380V or 415V ±10%
Phase	3Ph	3Ph
Frequency	50/60Hz	50/60Hz
Rated Output Current	400A	500A
Rated Output Voltage	34V	39V
Gas	CO ₂ / MAG	
Wire Type	Solid Wire, Flux-Cored Wire	
Rated Input	18.9 KVA / 15.5 KW	26.1 KVA / 21.9 KW
Rated Input Current	20.5 A	36.3 A
Range of Output Current	30 - 400 A	30 - 500 A
Range of Output Voltage	12 - 45 V	12 - 50 V
Rated Duty Cycle	60%	100%
Max. no-load Voltage	72 V	77 V
Memory	30	30
Insluating Level	H Level	H Level
Dimension (WxDxH)	345x632x580 (mm)	345x632x580 (mm)
Weight	55 Kg	61 Kg
Wire Feeder	CMXL-2301	
Welding Torch	WT3510-SD	WT5000-SD
Power Cable	BKPT-5002	BKPT-7002

Standard Accessories

Name	Specification	Quantity	Remarks
Analog remote control	P30102Z00	1	
Hex wrench	M8	1	For output terminal screw
Heat-shrink tube	40mm	2	For terminals of output cables
Glass fuse	10 A, 250 V	1	For circuit board P30066Q
Glass fuse	2 A, 250 V	1	For circuit board P30066Q
Ceramic fuse	4 A, 500 V	1	F2

User-friendly Control Panel



OTC DAIHEN Asia Co., Ltd.

Head Office & Factory

60/86 Mu 19, Navanakorn Industrial Estate Phase3, Klong Nuei

Bangkok (Sales) Office

TEL : (+66) 2529-2130-1, 2529-3335-7, 2909-4163-5 FAX: 23/43, Fl.16th Sorachai Bldg., 23 Soi Sukhumvit 63, Klongtonnue

Branch Office :

Laemchabang, Thailand

Representative Offices :

India, Indonesia and Malaysia

Authorised Distributor



BRAHM ENGINEERS

D-123, Phase -VII, Industrial Area, S.A.S. Nagar, Mohali. (PB)
Mobile: +91-9915579069, +91-9417009407
E-mail: brahmengineers@yahoo.co.in